




Calibration roller KWO-600, KWI-600



**Sensational:
Lightweight roller up to DN 600 !**

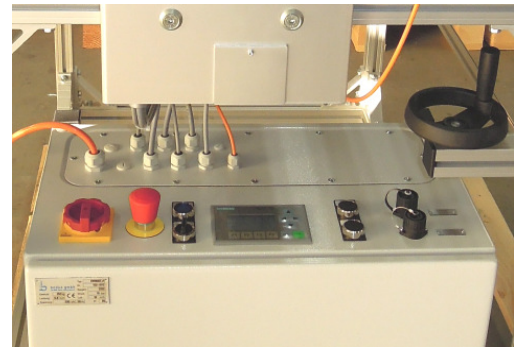

... electric elevation adjustment !

Regardless wether mobil or fixed installation...

What is calibration roller KWO-600, KWI-600?

An ingenious roller for the calibration of impregnated hose liners especially for sewer rehabilitation.

Advantages of calibration roller KWO-600, KWI-600

- feed table variable
- separate frequency transformer for top roller
- segregating transformer for trouble free working
- feed and return run
- roller gap adjustable, electrically and manually
- roller distance with three level velocity
- adjustable pre-roller
- high operational safety
- digital display for rolling speed
- digital display for rolling gap height
- also designed for fixed assembly (optional guide rail extension)
- fixed rollers (optional)
- interface for the documentation box DOCUBOY for pipeline renovation

Technical data

Voltage	230 V / 50 Hz
Power	360 W
Rolling speed	0 - 5 m/min
Rolling gap width	0 - 260 mm
Useable gap width	max. 1000 mm
Weight	approx. 250 kg

Subject to technical amendments.



Calibration roller KWO-600, KWI-600

Are you interested?

Yes, I/we would like

a non-binding presentation
 further information

an offer
 to order

Company	_____	Fon	_____
Person	_____	Fax	_____
Address	_____	e-Mail	_____
Country/PC/Place	_____		
Branche			
Fire brigade	<input type="checkbox"/>	Pipe cleaning	<input type="checkbox"/>
Civil defence	<input type="checkbox"/>	Other	<input type="checkbox"/>

Please send us your information, we will contact you as soon as possible.